

REUNION[®]

The advertisement features three different types of REUNION connectors: a small cylindrical connector with a gold-plated pin, a larger multi-pin circular connector with a blue ring, and a black cable with a circular connector. The background is a blurred cityscape at night. The entire scene is overlaid with several large, semi-transparent teal triangles and thin teal lines that create a sense of depth and connectivity.

*REUNION connectors
help you connect the world!*

深圳市瑞盈创联电子科技有限公司
SHENZHEN REUNION ELECTRONICS CO.,LTD

COMPANY PROFILE

公司简介



深圳市瑞盈创联电子科技有限公司是一家集连接器设计、生产、销售为一体的创新型企业。公司立足客户需求，高效、快捷的为客户提供高品质、高性价比的连接器解决方案：自营的REUNION圆形插拔自锁连接器金属及塑料系列达到欧美同类产品水平。通过了ISO9001、ISO14001、ISO13485及国军标质量体系认证，也获得了相应的UL、CE、CQC证书，REUNION连接器广泛应用于军工、照明、航海、医疗、储能、通讯、仪器仪表、工业自动化、光电测试、矿山工程、石油及核工业领域！

Shenzhen Reunion Electronics Co., Ltd. is an innovative enterprise integrating connector design, production, and sales. The company is based on customer needs, efficient, and fast to provide customers with high-quality, cost-effective connector solutions. The "REUNION" metal and plastic push-pull self-locking connectors have reached the level of similar products in Europe and the United States. "REUNION" connectors have passed the ISO9001, ISO14001 and ISO13485 certificates and National Military Standard Quality System certification, and also obtained the UL, CE, and CQC certificates. REUNION Connectors are widely used in the Military, LED, Lighting, Energy Storage, Battery, Navigation, Medical, Communications, Instrumentation, Industrial Automation, Nuclear Industry, and other fields!



Customization of wiring harness components

线束组件定制



非标定制连接器

我们可以为不同客户提供全系列防水 & 不防水，塑料 & 金属连接器。

推拉自锁金属连接器

Push-pull self-locking metal connector

REUNION®



产品参数

快速安全的推拉自锁系统
焊接、压接和印制板型接插件针芯
直式, 90°弯角式
多种定位销选择可避免相似连接器之间的混插
360°屏蔽提供全方位EMC防护(抗电磁干扰)
多芯型2-32芯, 高密度安装节约空间
插拔次数: >5000次
湿度: 在温度60°C, 最高湿度达95%
温度范围: -45°C~+125°C
振动: 10-2000HZ, 15g
机械冲击: 100g 6ms
盐雾腐蚀试验: >48h
防护等级: IP50~IP68
产品证书: UL

Product parameters

Fast and safe push-pull self-locking system
Welding, crimp, and printed circuit board type pins.
Straight, 90 degree Angle
Multiple position pin options can avoid mixedinsertion between similar connectors.
360°shielding provides comprehensive EMC protection (Anti electromagnetic interference)
Multi core type 2-32 cores , high-density installation saves space
Mating cycle: > 5000 times
Humidity: At a temperature of 60 °C, the maximum humidity reaches 95%
Temperature range: -45°C~+125°C
Vibration:10-2000Hz, 15g
Mechanical impact: 100g 6ms
Salt spray corrosion test: > 48h
Protection level: IP50~IP68
Certificate: UL



产品参数

快速安全的推拉自锁系统
焊接、压接和印制板型接插件针芯
多芯型: 1P系列: 2~14芯,
2P系列: 3~16芯, 高密度安装节约空间
塑料壳体, 双簧片锁定, 键槽防止转动
尾部螺帽和插座圆螺母采用颜色区分防止误插
插拔次数: >2000次
湿度: 在温度60°C, 最高湿度达95%
温度范围: -40°C~+80°C
防护等级: IP50/IP65
产品证书: UL

Product parameters

Fast and safe push-pull self-locking system
Welding, crimp, and printed circuit board type pins.
Multi core type 1P series: 2~14pins,
2P series: 3~16pins, high-density installation saves space
Plastic housing, double springs locking, groove to avoid rotation
Tinted back nut of plugs and round nut of sockets to avoid mismatching
Mating cycle: > 2000 times
Humidity: At a temperature of 60 °C, the maximum humidity reaches 95%
Temperature range: -40°C~+80°C
Protection level: IP50/IP65
Certificate: UL

接线柱连接器



电源模块连接器



电源模块连接器



储能连接器



储能连接器



3+9快锁连接器



产品参数

输入端与输出端颜色可选
 满足储能电池组连接后360°可旋转要求
 塑胶一体成型外壳, 绝缘可靠, 安装简单
 优异的过流能力
 正负极物理防呆
 产品认证: UL

Product parameters

Colors optional for Input and output
 Meet the requirements of 360° rotation after the energy storage battery pack is connected
 Integrated plastic shell, reliable insulation, and easy installation
 Excellent overcurrent capability
 Negative and positive physical fool-proof system
 Certificate: UL

超声刀连接器



一次性医疗连接器



静脉曲张射频消融连接器



IVL手柄



心脏导管插头



IVL导管插头



产品参数

安全可靠连接系统
多芯类型, 电源信号同时传输
焊接和PCB板印刷型针芯
紧凑的设计以节省空间
塑料壳体
防水等级: IP50
产品证书: UL

Product parameters

Secure and reliable connection system
Multi-core type, power and signal transmission simultaneously
Welding and printed circuit board type pins
Compact design to save space
Plastic housing
Protection level: IP50
Certificate: UL

3N电源系列



RJ45信号系列



螺纹系列




3N电源系列



RJ45信号系列



旋卡系列

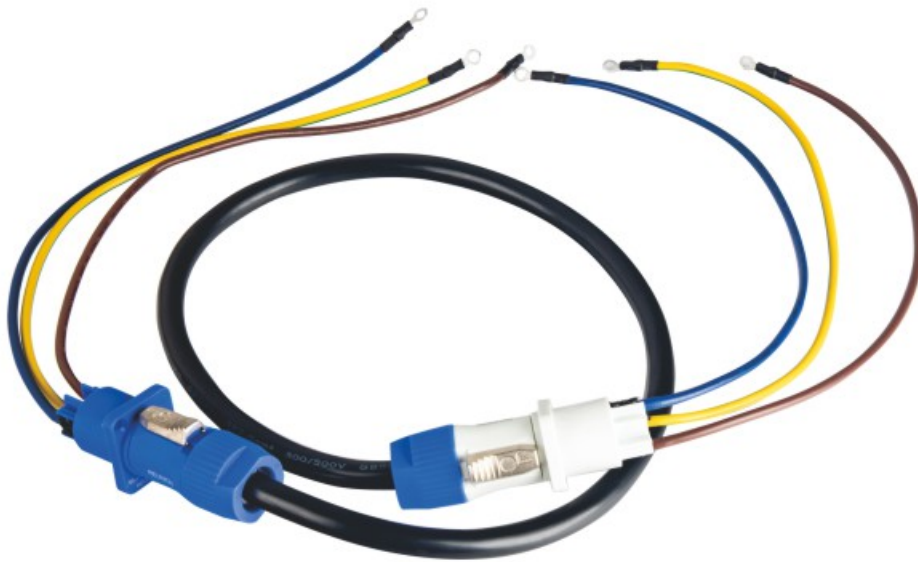

产品参数

250V/30A 电流容量
 快速便利的扭转锁定装置
 不同的锁键以避免误插
 多芯: 3针芯
 材料为尼龙加纤, 防火等级UL94-V0, 耐腐蚀
 耐候性好和有优良的电气性能, 高湿高温环境下
 仍具有良好的电绝缘性
 插座端子采用进口铍铜, 具有较高的寿命和导电率
 插拔次数: >2000次
 防护等级: IP50/IP67
 产品证书: CE/UL

Product parameters

250V/30A current capacity
 Quick and convenient turning locking system
 Different keys to avoid mismatching
 Multi-core type: 3pins
 Made of nylon fiber, Fire rating UL94-Vo and corrosion resistance;
 Good weather resistance and excellent electrical properties,
 high humidity and high temperature environment still has
 good electrical insulation
 Socket terminal adopts imported beryllium copper of which assure
 long life and good conductivity
 Mating cycle:> 2000 times
 Protection level: IP50/IP67
 Certificate: CE/UL

3芯扁平弯插头



3芯扁平PCB插座



3芯扁平弯插座



3芯扁平插座



3芯扁平连接器



3芯扁平板到线连接器



产品参数

250V/30A 电流容量
快速便利的插拔锁定系统
多芯: 3针芯
材料为尼龙加纤, 防火等级UL94-V0, 耐腐蚀
耐候性好和有优良的电气性能, 高湿高温环境下
仍具有良好的电绝缘性
插拔次数: >2000次
防护等级: IP50
产品证书: UL、CB、CQC

Product parameters

250V/30A current capacity
Quick and convenient push pull locking system
Multi-core type: 3pins
Made of nylon fiber, Fire rating UL94-Vo and corrosion resistance;
Good weather resistance and excellent electrical properties,
high humidity and high temperature environment still has
good electrical insulation
Mating cycle: > 2000 times
Protection level: IP50
Certificate: UL, CB, CQC



产品参数

安全的旋钮自锁结构
可供选多种键位防止错配
多芯可选: 2/3/4/5/6/7/8/9/10/16 PINS
焊接和印制板型接插件针芯
温度范围: -20°C~+80°C
防护等级: IP67
产品证书: UL

Product parameters

Safe rotating twist self-locking structure
Multiple keying options to avoid mismatching
Multi-core type: 2/3/4/5/6/7/8/9/10/16 Pins optional
Welding and printed circuit board type pins.
Temperature range: -20°C~+80°C
Protection level: IP67
Certificate: UL



产品参数

安全的螺纹连接系统
可供选多种键位防止错配
带屏蔽/不带屏蔽可选
焊接和印制板型接插件针芯
直式, 90°弯角式
温度范围: -20°C~+80°C
防护等级: IP67
产品证书: UL

Product parameters

Safe screwing connection system
Multiple keying options to avoid mismatching
Shielding and non-shielding version optional
Welding and printed circuit board type pins.
Straight, 90 degree Angle
Temperature range: -20°C~+80°C
Protection level: IP67
Certificate: UL



深圳市瑞盈创联电子科技有限公司 SHENZHEN REUNION ELECTRONICS CO.,LTD

电话: 0755-29790801

传真:0755-29790802

深圳市宝安区福海街道展城社区凤塘大道606号中京智云科技园
B栋2楼、3楼西面

Tel: +86 755 2979 0801

Fax: +86 755 2979 0802

www.reunionconnectors.com

West of 2nd and 3rd Floor, Building B, Zhongjing Zhiyun
Science Park, No. 606, Fengtang Avenue, Zhancheng Community,
Fuhai Street, Bao 'an District, Shenzhen